DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

KBPC 1005 / BR 305
THRU
KBPC 110 / BR 310

TECHNICAL SPECIFICATIONS OF SINGLE-PHASE SILICON BRIDGE RECTIFIER

VOLTAGE RANGE - 50 to 1000 Volts *CURRENT - 3.0 Amperes*

FEATURES

* Surge overloa rating: 50 Amperes peak
* Low forward voltage drop
* Small size: simple installation

MECHANICAL DATA

* Case: Molded plastic
* Epoxy: UL 94V-0 rate flame retardant
* Lead: MIL-STD-202E, Method 208 guaranteed
  Symbols molded or marked on body
* Mounting position: Any
* Weight: 3.36 grams



BR-3

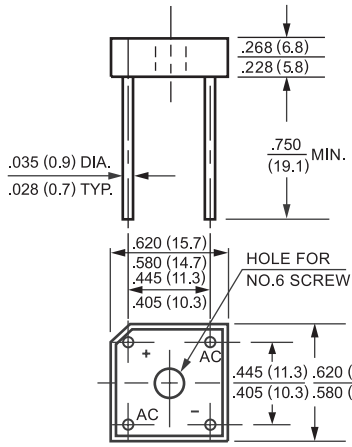

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

		SYMBOL	KBPC 1005 BR305	KBPC 101 BR31	KBPC 102 BR32	KBPC 104 BR34	KBPC 106 BR36	KBPC 108 BR38	KBPC 110 BR310	UNITS
Maximum Recurrent Peak Reverse Voltage		V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Bridge Input Voltage		V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Output Current at Tc = 50°C		I_O	3.0							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)		I_{FSM}	50							Amps
Maximum Forward Voltage Drop per element at 1.5A DC		V_F	1.0							Volts
Maximum CD Reverse Current at Rated DC Blocking Voltage per element	@TA = 25°C	I_R	10							uAmps
	@TC = 100°C		500							
I^2t Rating for Fusing (t<8.3ms)		I^2t	10							A^2Sec
Typical Junction Capacitance (Note1)		C_J	21							pF
Operating Temperature Range		T_J	-55 to + 125							°C
Storage Temperature Range		T_{STG}	-55 to + 150							°C

NOTES : 1.Measured at 1 MHz and applied reverse voltage of 4.0 volts
2. Thermal Resistance from Junction to Ambient and from junction to lead mounted on P.C.B. with 0.47 x 0.47" (12x12mm) copper pads.

NEXT EXIT

FIG. 1 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

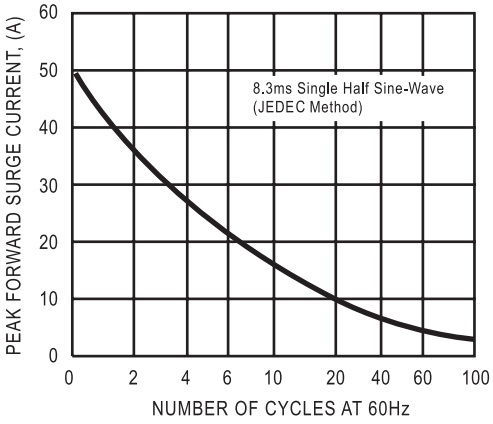

FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

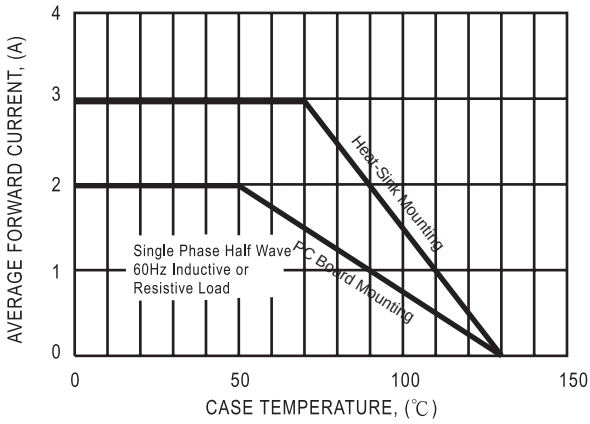

FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

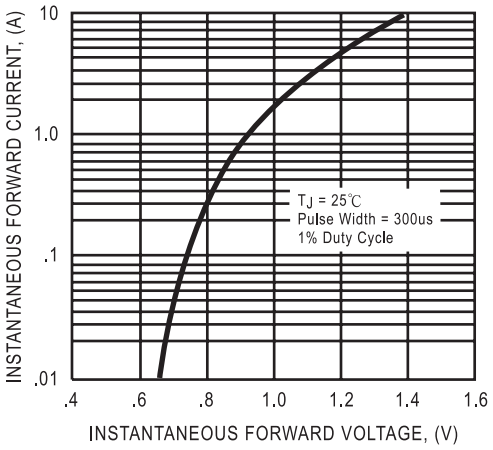

FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

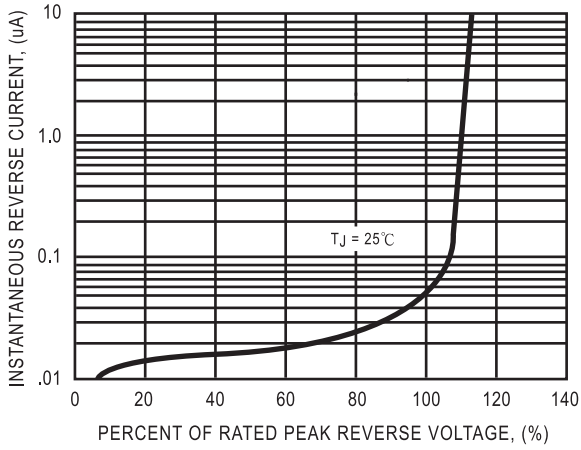

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.