LED Lighting Transformers DC12V 18W 36W 72W 100W High Quality Safe Driver For LED Strip Power Supply

Specification:

Power : 18W / 36W / 72W / 100W

Input voltage : (AC 90-240V);50/60HZ

Output voltage : DC12V

Over-current protection and short circuit protection

Working Temperature: 0~40C

Storage Temperature: -20~60C

Ambient Humidity: 0~95% Non-Condensation

Product Pictures:

DC12V 18W / 36W / 72W / 100W LED Lighting Transformers

Input protection


Output protection

Over-voltage protection

Short circuit protection

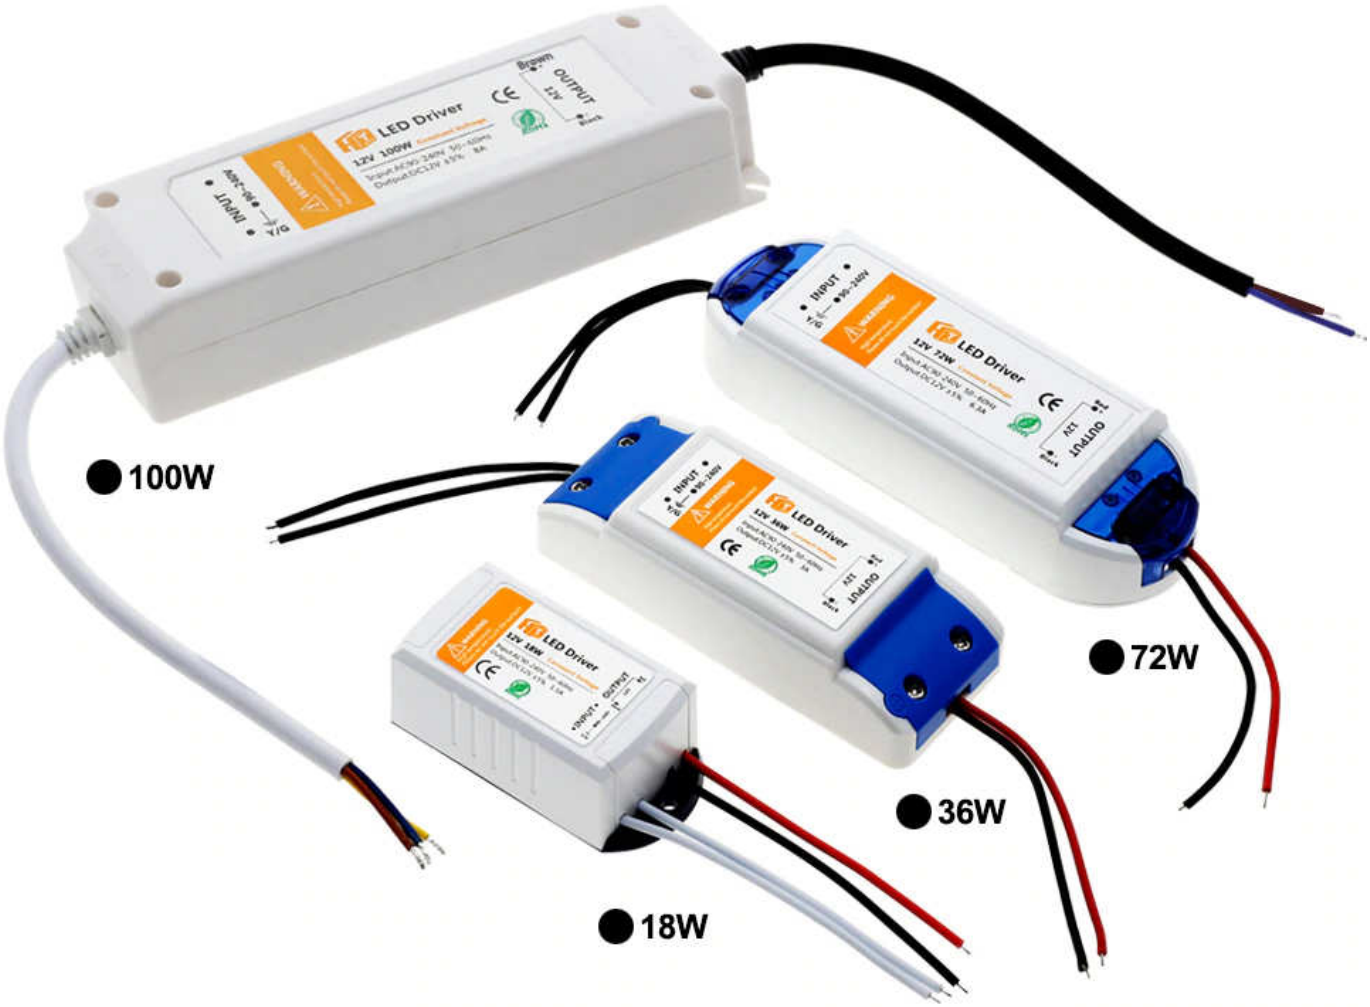

■ DC12V 100W

Power: 100W

Input voltage: (AC 90-240V);50/60HZ

Output voltage: DC 12V±5%

Dimension:170*47*35mm

Input electric current: AC 0.62A

Output electric current: DC 8A

■ DC12V 72W

Power: 72W
Input voltage: (AC 90-240V);50/60HZ
Output voltage: DC 12V±5%

Dimension: 145*48*30.5mm
Input electric current: AC 0.62A
Output electric current: DC 6.3A

■ DC12V 36W

Power: 36W
Input voltage: (AC 90-240V);50/60HZ
Output voltage: DC 12V±5%

Dimension: 115*45*28.5mm
Input electric current: AC 0.62A
Output electric current: DC 3A

■ DC12V 18W

Power: 19W

Input voltage: (AC 90-240V);50/60HZ

Output voltage: DC 12V±5%

Dimension: 67*38.5*28.5mm

Input electric current: AC 0.2A

Output electric current: DC 1.5A